CIO100 SYMPOSIUM

PIXEL MAP · TECHNICAL REPORT

Client / event: CIO Africa


Venue: Nairobi · Event date: 2026-10-29

Prepared by: DX5VE Studio · Revision: 1 · Generated: 10/29/2026

3 LED surfaces · 158 cabinets · 59.00 m² · canvas 8064 × 1152 px

LEFT-1

LED screen · front-facing pixel map

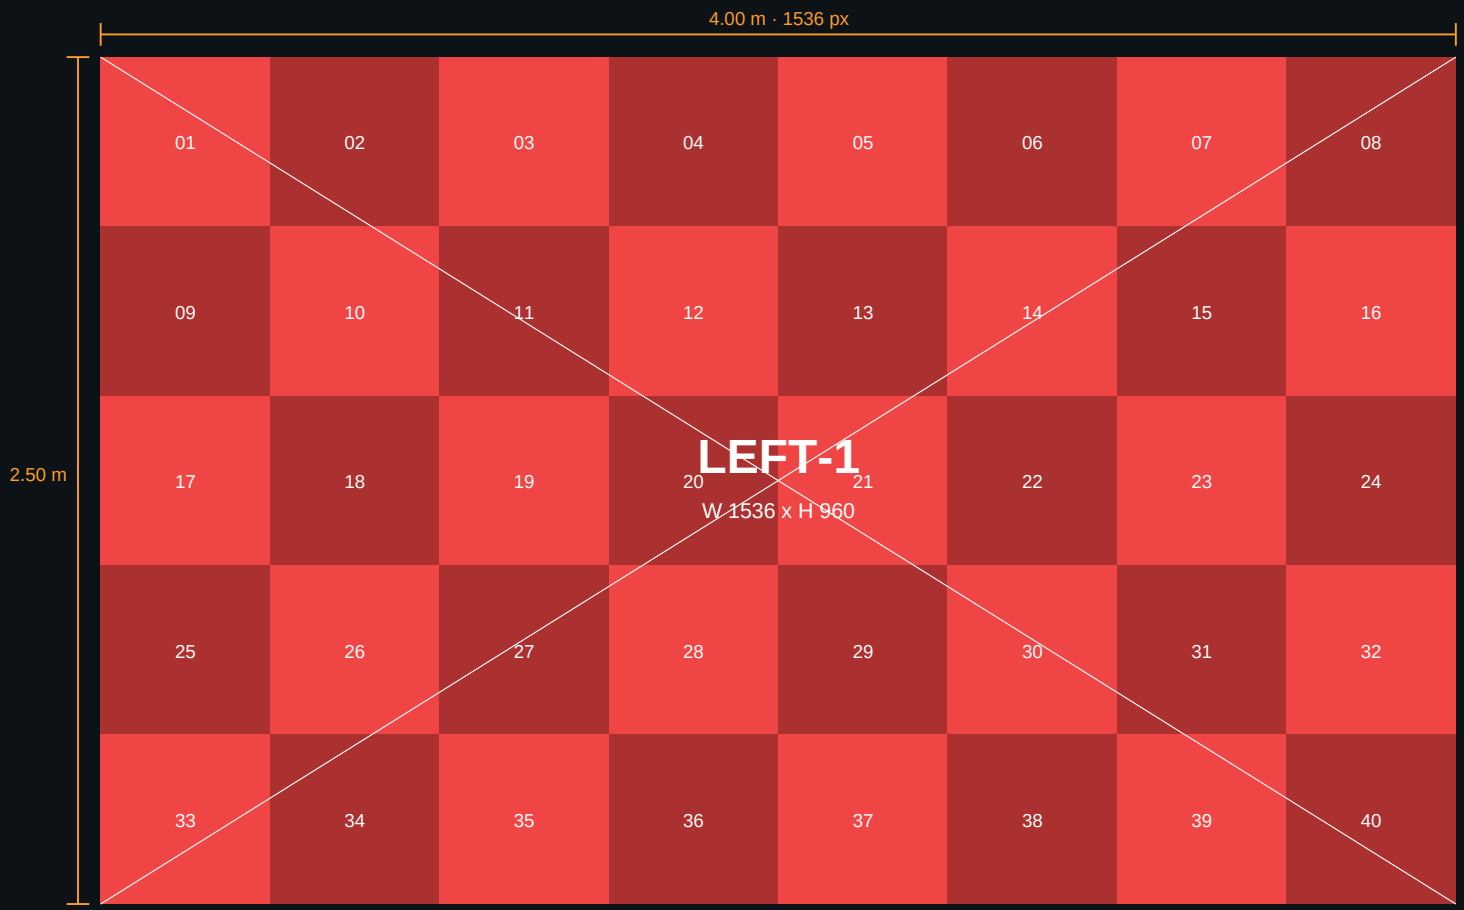


Screen Details

Display name	LEFT-1	Physical size	4.00 × 2.50 m	Canvas offset	
Module type	P2.6 · 50 × 50 cm	Active panels	40 un.	Position	
Panels (W × H)	8 × 5	Physical area	10.00 m²	Rotation	
Panel resolution	192 × 192 px	Resolution	1536 × 960 px (1,474,560)	Grid numbers	

CENTER

LED screen · front-facing pixel map

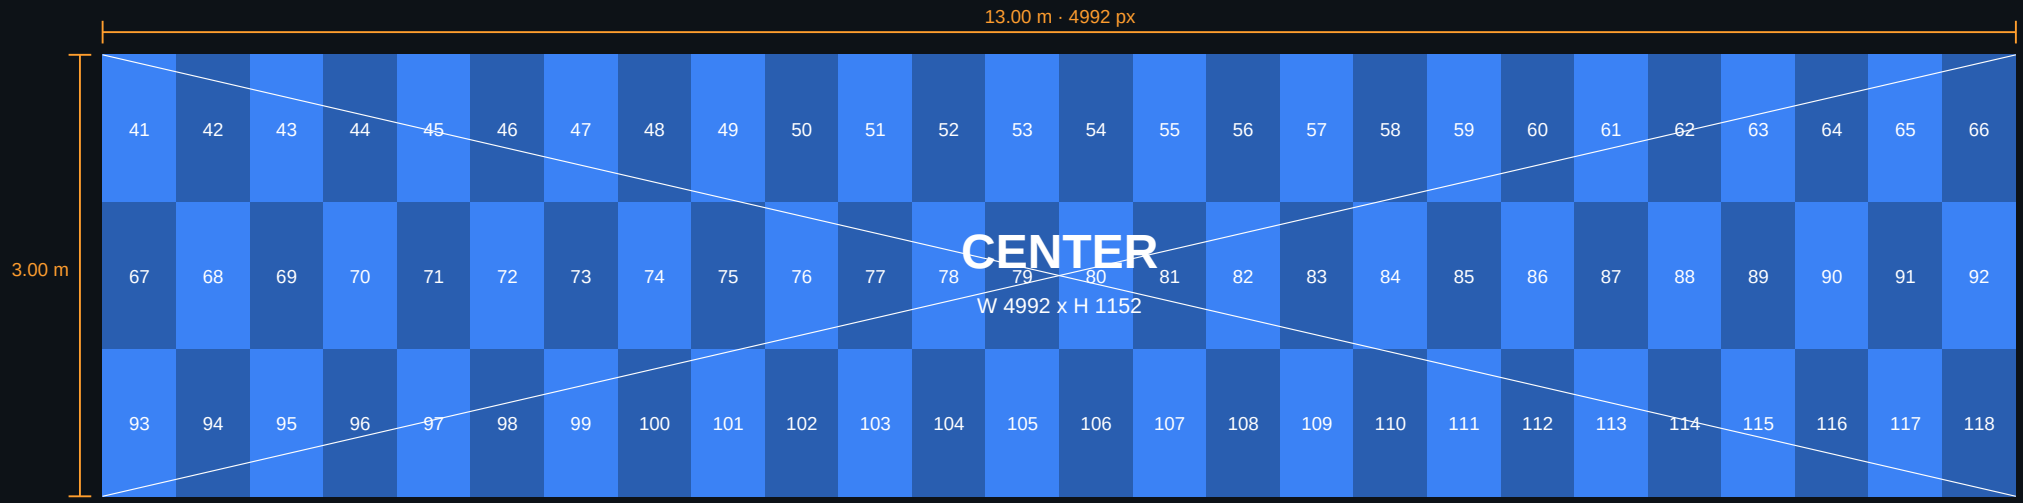


Screen Details

Display name	CENTER	Physical size	13.00 × 3.00 m	Canvas offset	
Module type	P2.6 · 50 × 100 cm	Active panels	78 un.	Position	
Panels (W × H)	26 × 3	Physical area	39.00 m²	Rotation	
Panel resolution	192 × 384 px	Resolution	4992 × 1152 px (5,750,784)	Grid numbers	

RIGHT-1

LED screen · front-facing pixel map

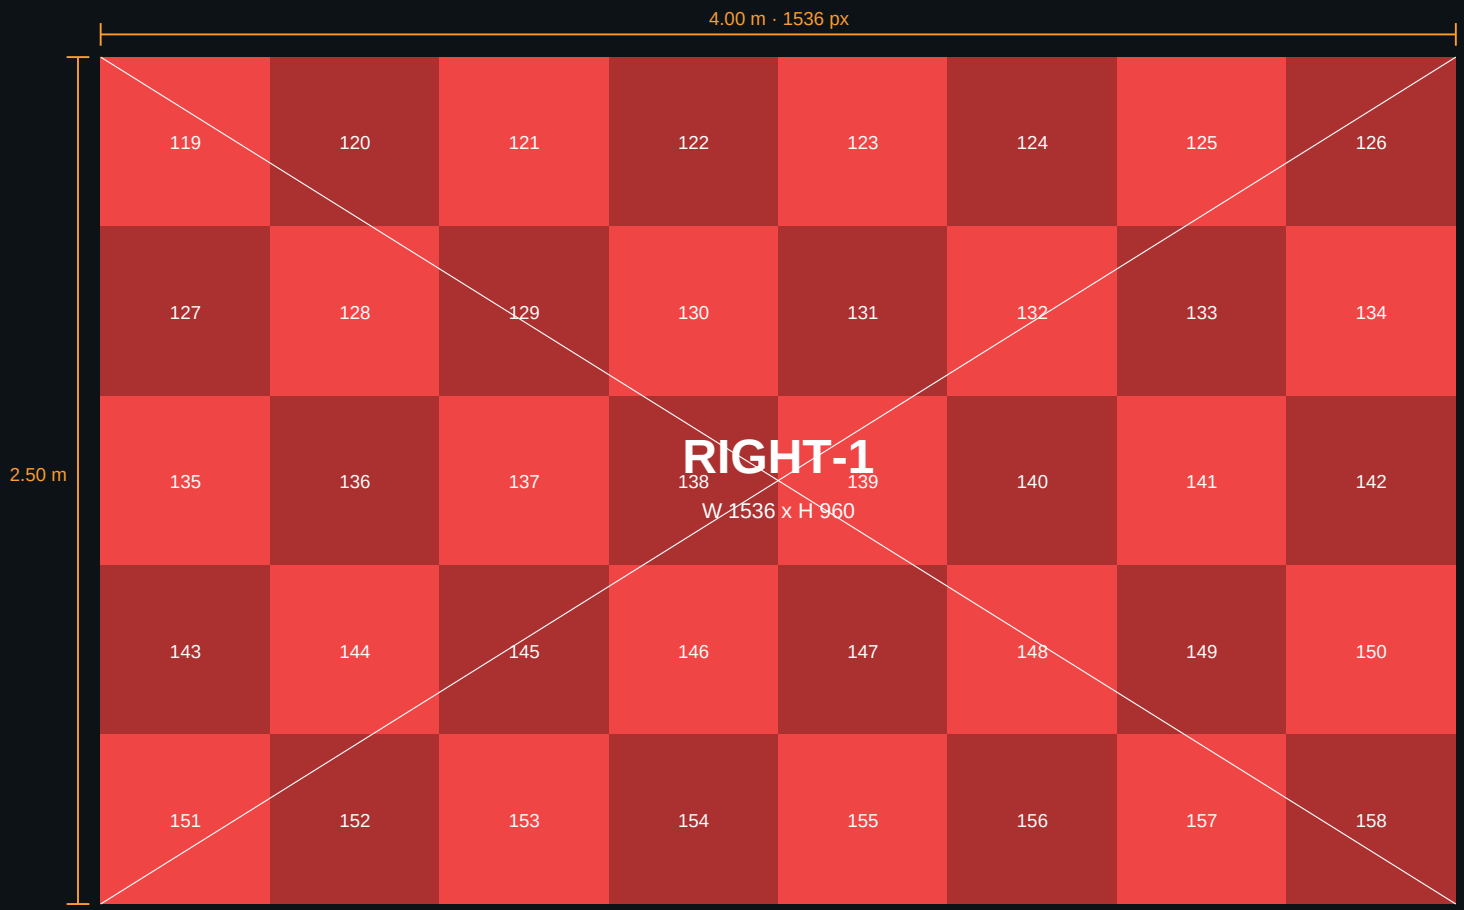


Screen Details

Display name	RIGHT-1	Physical size	4.00 × 2.50 m	Canvas offset	
Module type	P2.6 · 50 × 50 cm	Active panels	40 un.	Position	
Panels (W × H)	8 × 5	Physical area	10.00 m²	Rotation	
Panel resolution	192 × 192 px	Resolution	1536 × 960 px (1,474,560)	Grid numbers	

FULL CANVAS LAYOUT

Logical graphics canvas — screens at their configured pixel offsets

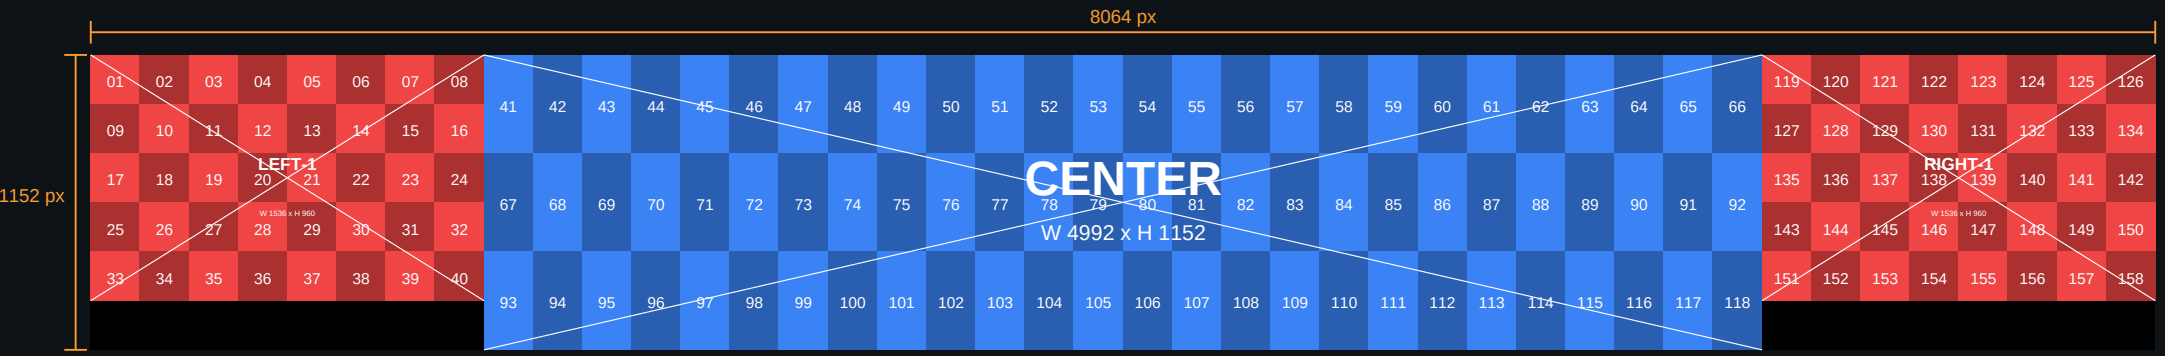

Global Layout


Total canvas	8064 × 1152 px	Footprint width	21.00 m
Active panels	158 un.	Footprint height	3.00 m
Unused canvas	589,824 px	Occupied pixels	8,699,904
Active area	59.00 m²	Note	Logical canvas "` processor output

SCREEN	X	Y	WIDTH	HEIGHT	PANELS	AREA
LEFT-1	0	0	1536 px	960 px	8×5	10.00 m²
CENTER	1536	0	4992 px	1152 px	26×3	39.00 m²
RIGHT-1	6528	0	1536 px	960 px	8×5	10.00 m²

MASTER STAGE ELEVATION & RIGGING

Front elevation · screen trim heights above floor


SCREEN	BOTTOM	TOP	SIZE
LEFT-1	1.00 m	3.50 m	4×2.5
CENTER	1.00 m	4.00 m	13×3
RIGHT-1	1.00 m	3.50 m	4×2.5

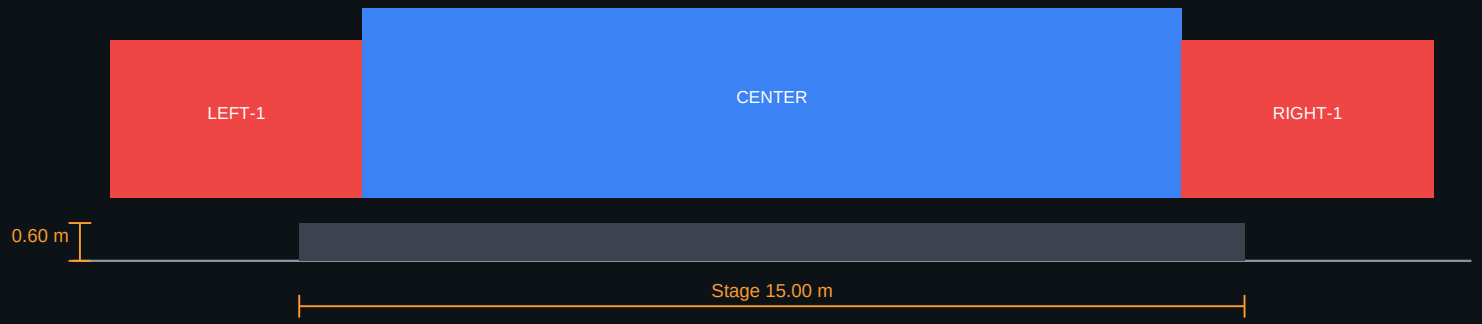

Heights are measured from venue floor to the LED's bottom and top edges using the saved screen positions. Rigging points, loads and structure must be verified on site by a qualified rigger.

LEFT-1 · DATA / PORT MAPPING


Signal wiring · NovaStar VX1000 · 1 RJ45 ports (CAT6) · serpentine by column

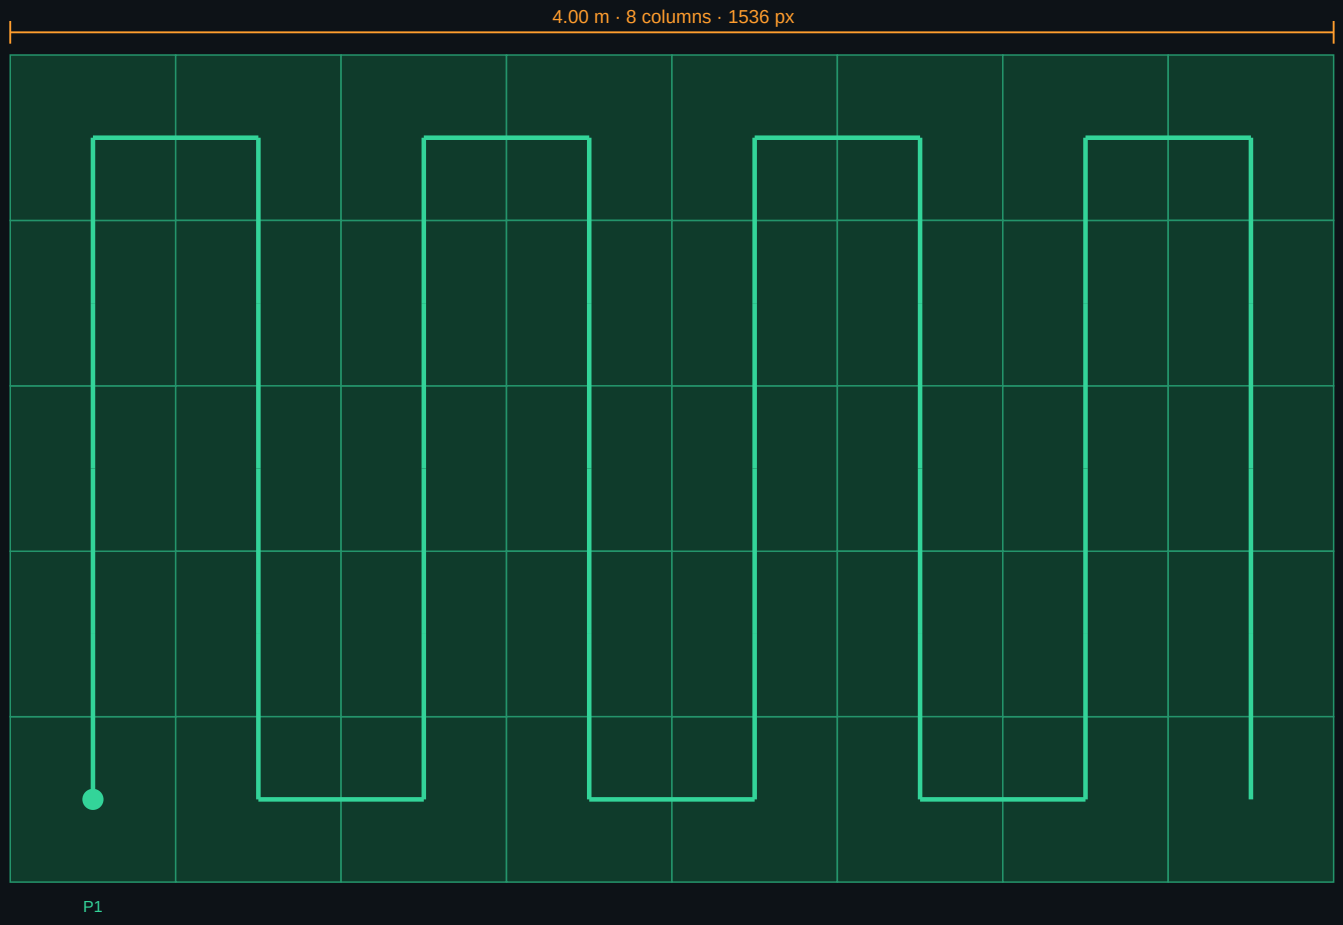

PORT	COLUMNS	CAB	PIXELS	LOAD
P1	C1–C8	40	1,474,560	227% !

LEFT-1 · POWER DISTRIBUTION

Power wiring · 230 V · 3-phase · 4 circuits

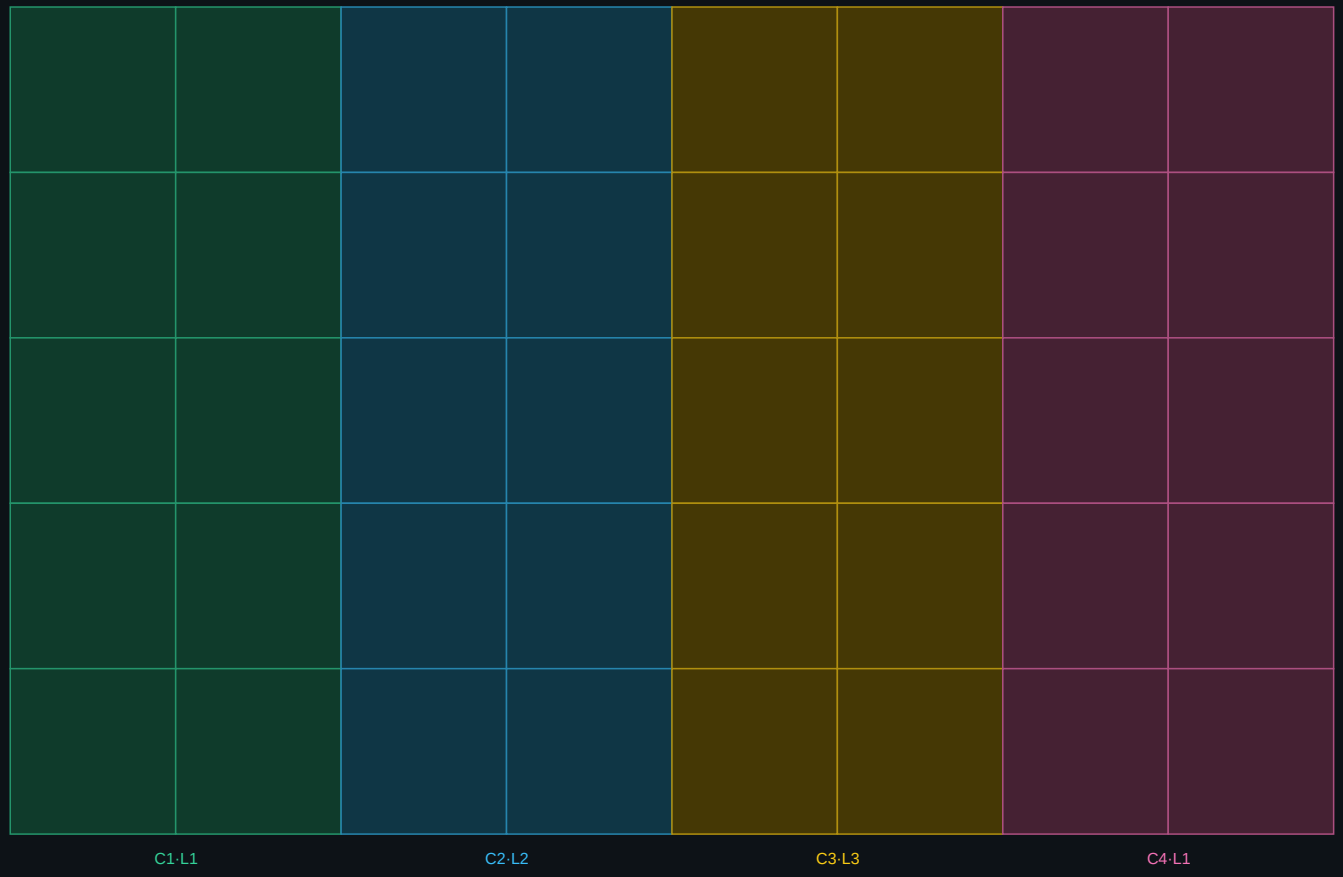

CIRCUIT	PHASE	CAB	MAX W	AMPS	LOAD
C1	L1	10	2000	8.7	54%
C2	L2	10	2000	8.7	54%
C3	L3	10	2000	8.7	54%
C4	L1	10	2000	8.7	54%


Max load	8.00 kW
Typical	not entered
Total current	34.8 A
Cab / circuit	10

Based on 200 W max per cabinet and 16 A circuits loaded to 80%. Final electrical design must be verified by a qualified electrician.

CENTER · DATA / PORT MAPPING


Signal wiring · NovaStar VX1000 · 4 RJ45 ports (CAT6) · serpentine by column

PORT	COLUMNS	CAB	PIXELS	LOAD
P4	C1–C8	24	1,769,472	272% !
P5	C9–C16	24	1,769,472	272% !
P6	C17–C24	24	1,769,472	272% !
P7	C25–C26	6	442,368	68%

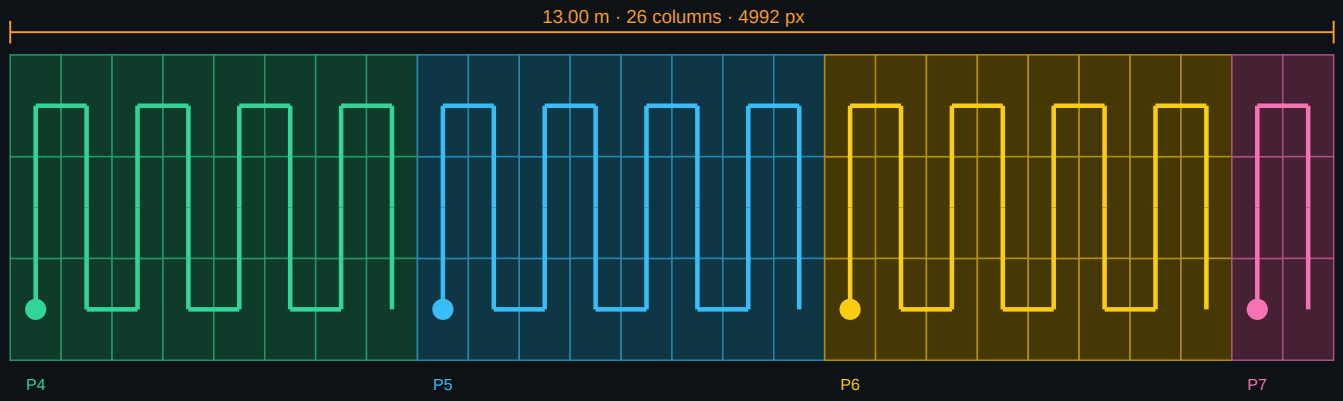

CENTER · POWER DISTRIBUTION

Power wiring · 230 V · 3-phase · 7 circuits

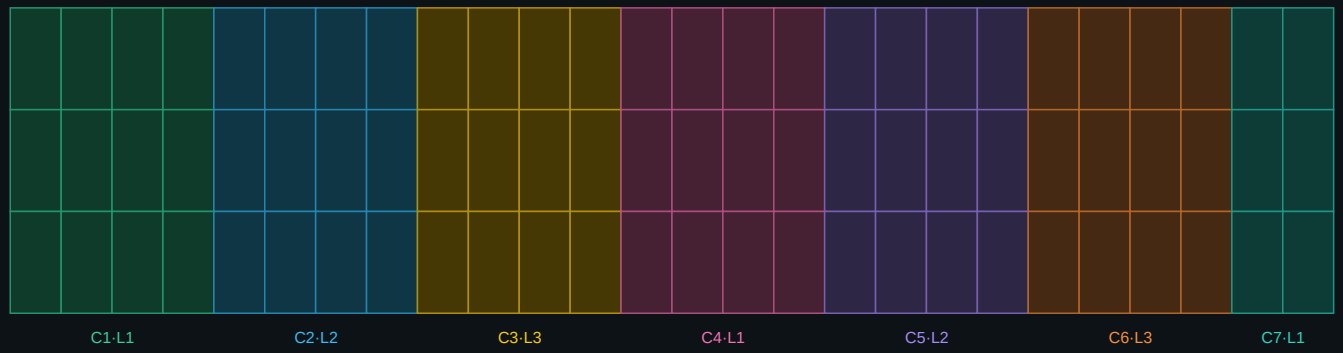


CIRCUIT	PHASE	CAB	MAX W	AMPS	LOAD
C1	L1	12	2400	10.4	65%
C2	L2	12	2400	10.4	65%
C3	L3	12	2400	10.4	65%
C4	L1	12	2400	10.4	65%
C5	L2	12	2400	10.4	65%
C6	L3	12	2400	10.4	65%
C7	L1	6	1200	5.2	33%

Max load	15.60 kW
Typical	not entered
Total current	67.8 A
Cab / circuit	12

Based on 200 W max per cabinet and 16 A circuits loaded to 80%. Final electrical design must be verified by a qualified electrician.

RIGHT-1 · DATA / PORT MAPPING


Signal wiring · NovaStar VX1000 · 1 RJ45 ports (CAT6) · serpentine by column

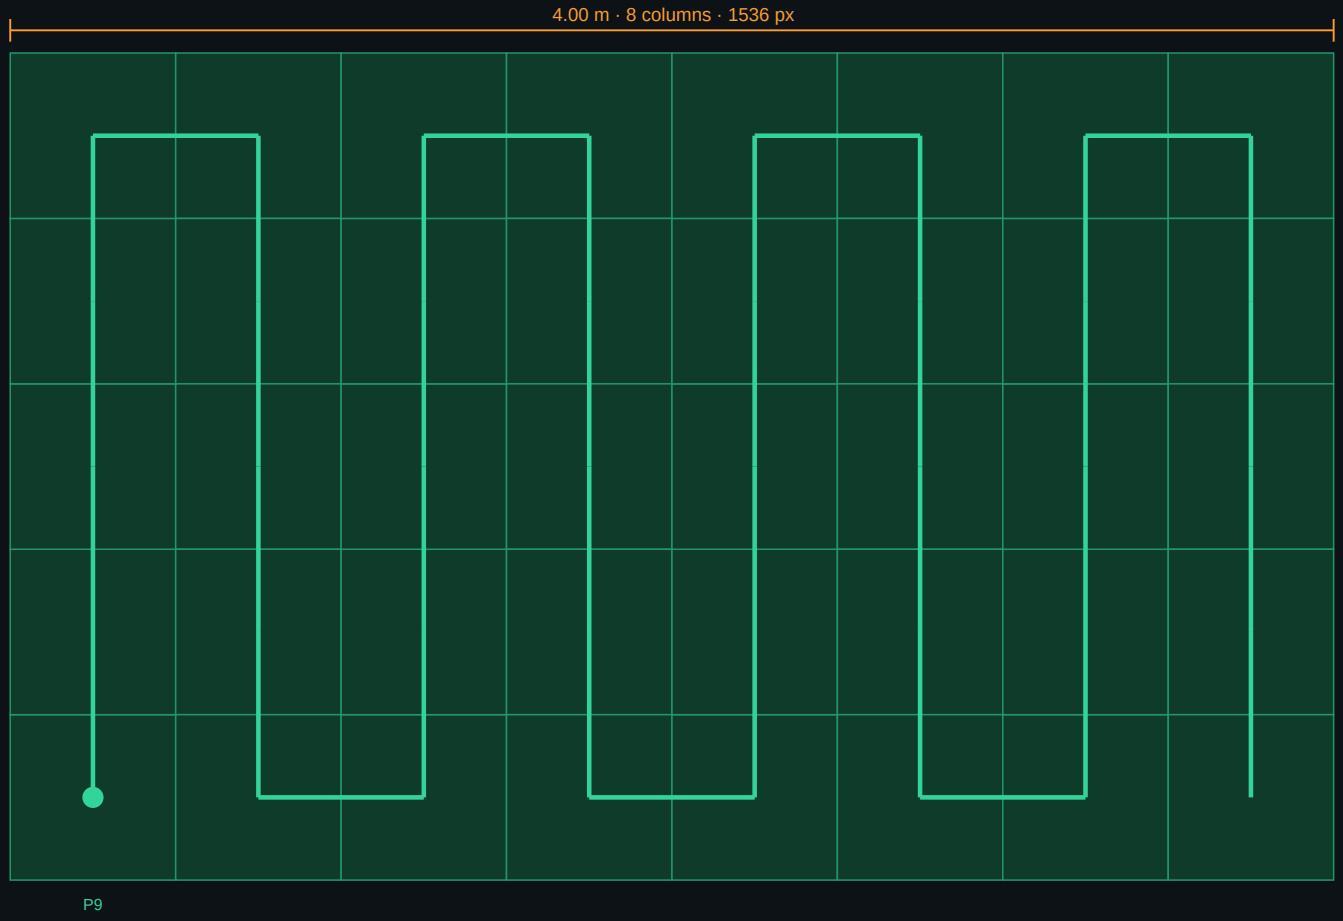

PORT	COLUMNS	CAB	PIXELS	LOAD
P9	C1–C8	40	1,474,560	227% !

RIGHT-1 · POWER DISTRIBUTION

Power wiring · 230 V · 3-phase · 4 circuits

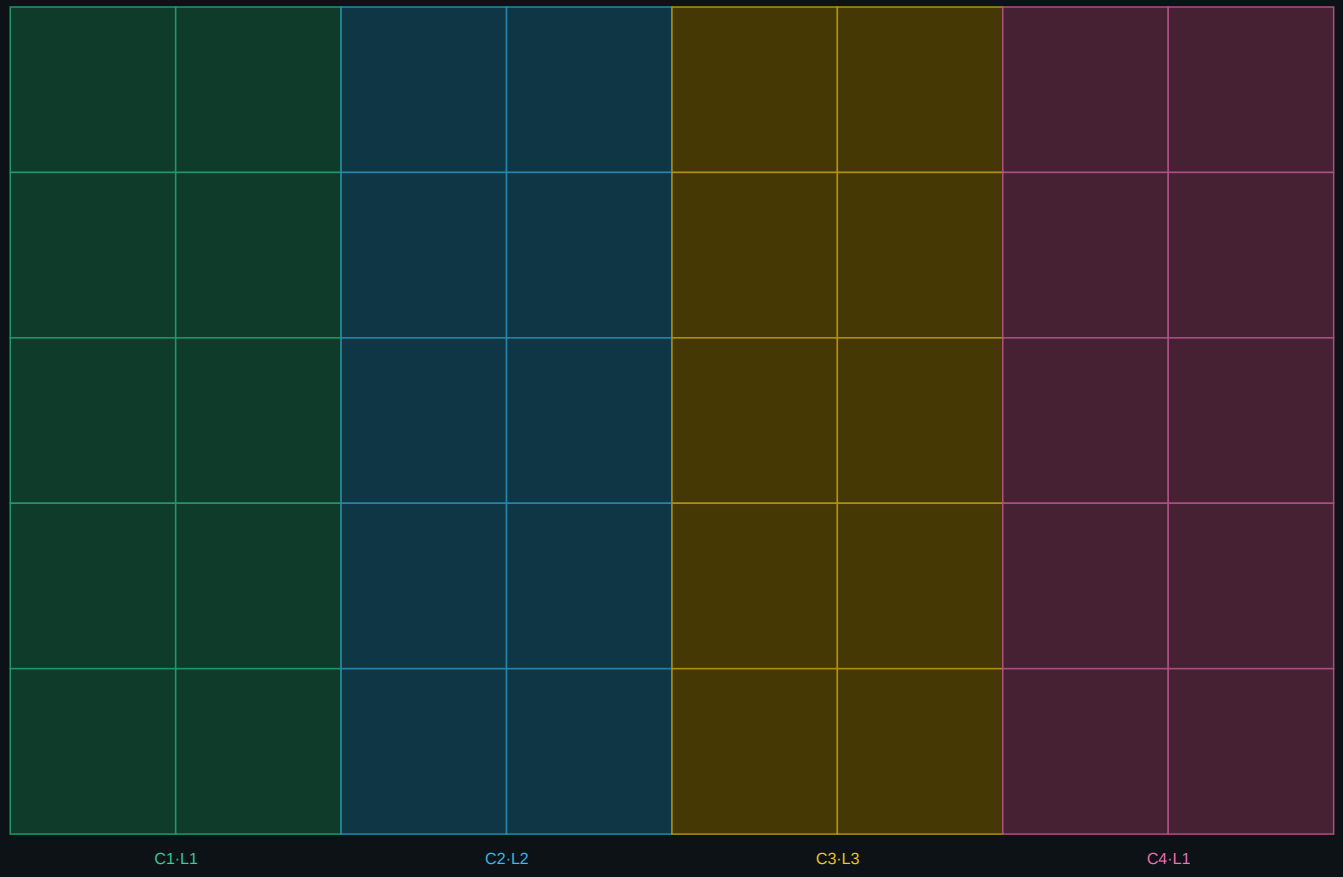

CIRCUIT	PHASE	CAB	MAX W	AMPS	LOAD
C1	L1	10	2000	8.7	54%
C2	L2	10	2000	8.7	54%
C3	L3	10	2000	8.7	54%
C4	L1	10	2000	8.7	54%

Max load	8.00 kW
Typical	not entered
Total current	34.8 A
Cab / circuit	10

Based on 200 W max per cabinet and 16 A circuits loaded to 80%. Final electrical design must be verified by a qualified electrician.

VALIDATION & EQUIPMENT

Engineering warnings and bill of materials (quantities only — no prices)

STATE	ISSUE	DETAIL
Warning	CENTER: exceeds single-port capacity	4992 × 1152 px needs more than one RJ45 port (port max 4096 × 1080).
Blocked	NovaStar VX1000 over capacity	8,699,904 px patched against a 6,500,000 px limit.
Blocked	CENTER: resolution ≠ cabinet specification	P2.6 on a 26 × 3 cabinet grid gives 4992 × 1155 px, but the screen is set to 4992 × 1152 px.
Blocked	VX1000: incompatible chain	LED load 8,699,904 px exceeds the VX1000 capacity of 6,500,000 px.
Blocked	VX1000: incompatible chain	Source 1920×1080 and LED canvas 8064×1152 have different aspect ratios — content will crop unless stretched.
Blocked	VX1000: incompatible chain	CENTER (4992×1152) exceeds a single VX1000 port (4096×1080).
Blocked	VX1000: port / capacity conflict	CENTER · chain 8/10 needs RJ45 Port 11, but VX1000 only has 10 ports. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Blocked	VX1000: port / capacity conflict	CENTER · chain 9/10 needs RJ45 Port 12, but VX1000 only has 10 ports. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Blocked	VX1000: port / capacity conflict	CENTER · chain 10/10 needs RJ45 Port 13, but VX1000 only has 10 ports. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Blocked	VX1000: port / capacity conflict	RIGHT-1 · chain 3/3 needs RJ45 Port 11, but VX1000 only has 10 ports. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Blocked	VX1000: port / capacity conflict	Total LED load 8,714,880 px exceeds the VX1000 processing capacity of 6,500,000 px. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Blocked	VX1000: port / capacity conflict	The pixel load needs at least 16 ports at 650,000 px each, but VX1000 only offers 10. Recommended: Add a second processor and move 4 port(s) of LED onto it.
Warning	VX1000 RJ45 Port 4 at 91%	591,360 px of 650,000 px used — 58,640 px remaining.
Warning	VX1000 RJ45 Port 5 at 91%	591,360 px of 650,000 px used — 58,640 px remaining.

ITEM	MODEL	QTY	LOCATION	SPEC
LED cabinet	P2.6 500×500 mm	40	LEFT-1	192×192 px per cabinet
Data cable (CAT6) — processor to first cabinet	CAT6	1	LEFT-1	Length to be measured on site
Data jumper (CAT6) — cabinet to cabinet	CAT6	39	LEFT-1	Short jumper
Power circuit / feed		4	LEFT-1	16 A @ 230 V
LED cabinet	P2.6 500×1000 mm	78	CENTER	192×384 px per cabinet
Data cable (CAT6) — processor to first cabinet	CAT6	4	CENTER	Length to be measured on site
Data jumper (CAT6) — cabinet to cabinet	CAT6	74	CENTER	Short jumper
Power circuit / feed		7	CENTER	16 A @ 230 V
LED cabinet	P2.6 500×500 mm	40	RIGHT-1	192×192 px per cabinet
Data cable (CAT6) — processor to first cabinet	CAT6	1	RIGHT-1	Length to be measured on site
Data jumper (CAT6) — cabinet to cabinet	CAT6	39	RIGHT-1	Short jumper
Power circuit / feed		4	RIGHT-1	16 A @ 230 V
LED processor	NovaStar VX1000	1	VX1000	10 outputs